



Turtle Beach Ear Force XO Seven Microphone Windscreen Replacement

This guide will illustrate how to remove the windscreen on a microphone.

Written By: Andrew Rudnick



INTRODUCTION

The windscreen is designed to prevent dust and moisture from getting into the microphone. It is held onto the microphone by a single 0.4 cm long Phillips head screw attached by a mounting bracket. Due to its fragile design, the windscreen can easily be torn, but it can quickly be replaced with the help of this guide.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Unplug microphone from headset





- First remove the microphone from the headset. Pull gently on the end of the microphone where it attaches to the headset.

Step 2 — Removing the screw



- Using a Philips #0 screwdriver, unscrew the 4-mm-long screw that attaches the windscreen to the microphone.

Step 3 — Remove metal plate and then windscreen

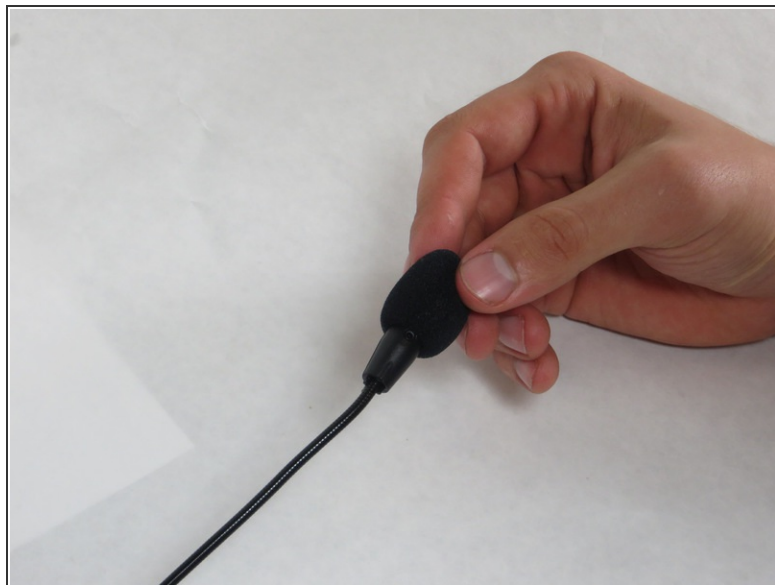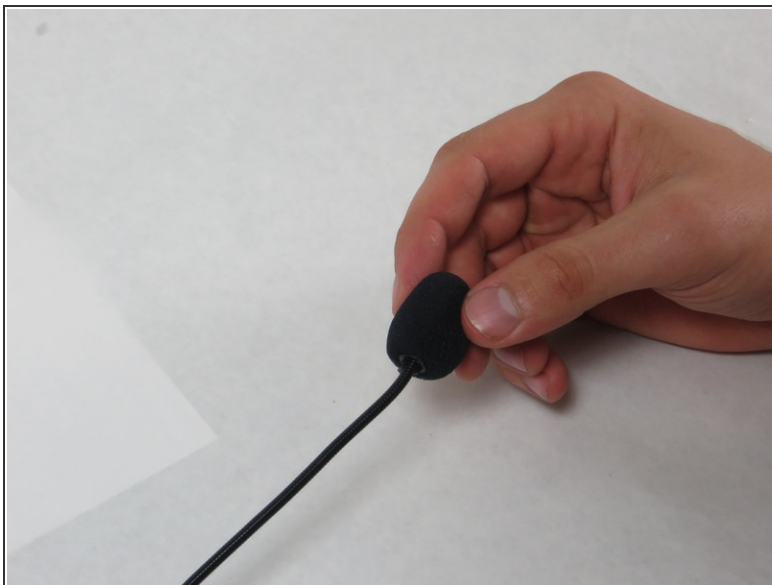

- Now that the screw is removed, remove the slim metal plate at the base of the windscreen by gently pulling on the plate.
- Then slide the windscreen off of the microphone.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-24 02:00:01 PM.